


Mac 250

Stationary Compactor

Standard Features

<p>Key-lock Start Switch.</p> <p>Reverse Push Button</p> <p>Red Mushroom-head Stop Button.</p> <p>Solid State Motor Starter Overload. Adjustable 9-45 Amp.</p> <p>NEMA 12/13 Panel Box.</p>	<p>Power Unit Weather Cover.</p> <p>Power Unit Factory Ready for 208-230-460 Volt 3 phase.</p> <p>Automatic Motor Starter Reset.</p>
---	--

Mfr. Rating	2.5 cubic yards	Cycle Time	48 seconds
Industry Rating	1.83 cubic yards	Motor	15 H.P. TEFC
Clear Top Opening	58" x 54"	Pump	13 GPM vane
Hydraulic Cylinders	(2) 4-1/2" bore x 2-1/2" rod	Frame Floor	3/8" plate
Ram Penetration	14"	Frame Sides	3/8" plate
Packing Force	Normal: 58,300 lbs. Maximum Pack-Out: 62,400 lbs.	Breaker Bar	8" x 6" x 3/4" angle
Ram Face PSI	Normal: 32.38 PSI Maximum: 34.66 PSI	Ram Face	1/2" plate
Hydraulic Pressure	Normal: 2150 PSI Maximum: 2300 PSI	Ram Floor	1/2" plate
Ram Face Dimensions	30" x 60"	Ram Top	1/4" plate
		Ram Sides	1/4" plate
		Ram Guides (4)	UHMWPE

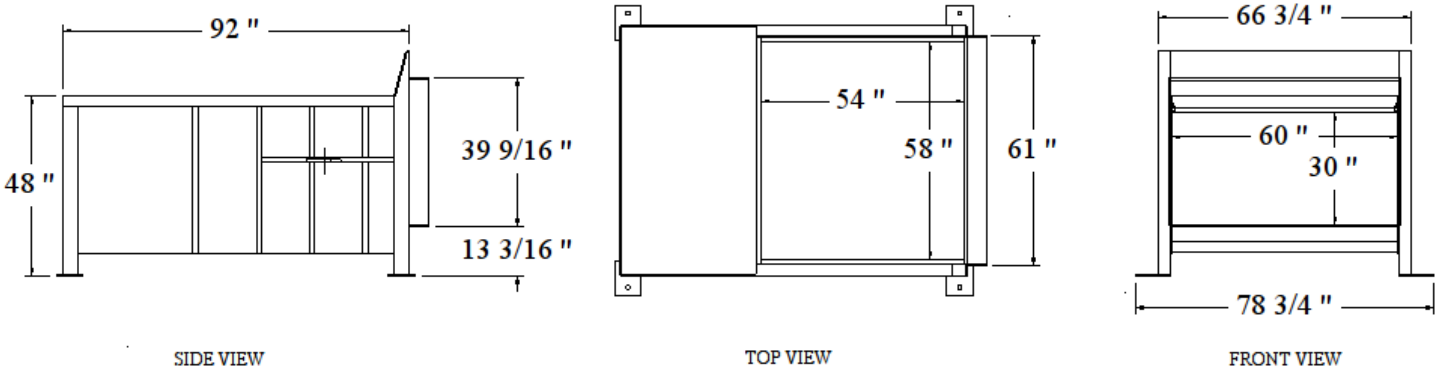

4717 Massachusetts Avenue
 Indianapolis, Indiana
 317-545-3341
 800-447-5205
 Fax: 317-545-8760