

SELF-CONTAINED COMPACTORS

RJ-250SC

Self-Contained Compactor



RJ-250SC
34 cu. yd. configuration pictured



RJ-250SC Features

- ▼ Great for waste with high liquid content
- ▼ Qwik Clean® Tank
- ▼ Full Door Seal With P-Seal
- ▼ CYCON Life-Xtender™ Cyclic Control System
- ▼ Customizable For Your Application

The Worldwide Compaction Leader

Marathon® Equipment is known throughout the world as one of the leading manufacturers of quality on-site waste compaction products. The RamJet® brand has been the industry standard for quality and innovation for more than 50 years, and includes stationary and self-contained compactors, compaction containers, apartment and high-rise compactors, pre-crushers, transfer systems, and a wide array of options for virtually any application.













Environmental
Solutions Group®

A DOVER COMPANY

RJ-250SC Compactor

Overview

Perfect for:

-  Malls / Shopping Centers
-  Dairies
-  Large Restaurants
-  Cafeterias / Fast Food
-  Airline Food Service
-  Supermarkets
-  Food Processors
-  Theme Parks/Resorts
-  Hospitals/Institutions
-  Hotels

Why Marathon® Equipment Is the Preferred Choice

Marathon brand components are selected for longevity and minimum maintenance, with special attention given to the selection of high-duty cycle components. Stress engineering provides the optimum degree of structural integrity. Only the best materials are used, and the highest standards of quality are observed in the manufacturing process.

Our RamJet® units are state-of-the-art in roll-off self-contained compactors, featuring large feed openings, and expanded container storage capacity. They are designed to optimize safety for workers, store and transport your waste, prevent contamination of public areas in accordance with public health department requirements, improve working conditions for your employees, and reduce disposal costs.

The RJ-250SC compactor can be customized with a variety of loading arrangements to suit your specific needs.

The RJ-250SC is perfect for weekly volumes of more than 100 cubic yards of wet or general waste materials. All models have a packer head permanently attached to the container.



Some images shown with optional equipment

WASTE COMPACTORS

RJ-250SC Series Compactor

Features



RJ-250SC Features

- ▼ Exclusive 41" x 58" (1041 mm x 1473 mm) feed opening to handle large, bulky items.
- ▼ Continuous feeding capability — even while the compactor is operating.
- ▼ Adaptable to special loading systems such as large capacity hoppers, security chutes, or total enclosures.
- ▼ Odor and pest control from the Marathon® Ozone Odor Control option.
- ▼ Easy loading from either ground or dock level.
- ▼ Up to 24 tons (21,772 kg) of crushing force to reduce refuse to a fraction of its former size, saving valuable space and reducing landfill trips.
- ▼ Fire hose connection provided on each unit.
- ▼ Factory testing to ensure leak-proof construction.



Perfect for Tipper System Applications

The RJ-250SC is the perfect choice for applications requiring a tipper system. Bags of waste are put directly onto the tipper and dumped into the compactor. The self-contained compactor effectively solves spillage and leakage problems associated with conventional stationary compactors and containers.

Some applications require a high degree of security and sanitation. The RJ-250SC provides both. Waste is safely stored out of reach of scavengers. Sanitary conditions are enhanced even further with the optional **Marathon** Ozone Odor Control System, which destroys odor-producing bacteria by molecular reaction.



Available with Bayne Thinline® Cart Lifter

If equipped with an optional integral cart lifter, the RJ-250SC offers an economical and safety conscious solution for a wide variety of waste material handling applications.

Bayne Thinline® cart lifters work with standard two-bar roll-out carts and can lift up to 750 lbs. Lifter has a powder coated finish so it can stand up to the elements and be easily cleaned.



For more information or to order, call 1-800-633-8974 or visit us at www.marathonequipment.com


WASTE COMPACTORS



RJ-250SC Series Compactor

The perfect compactor for high volume wet waste

- ▼ Large 41" x 58" (1041 mm x 1473 mm) Feed Opening
- ▼ Full Door Seal with P-Seal
- ▼ Bubble Gate with Auto Relatch and Double-Hinge Door
- ▼ Qwik Clean® Tank
- ▼ Cycon Life-Xtender™ Cyclic Control

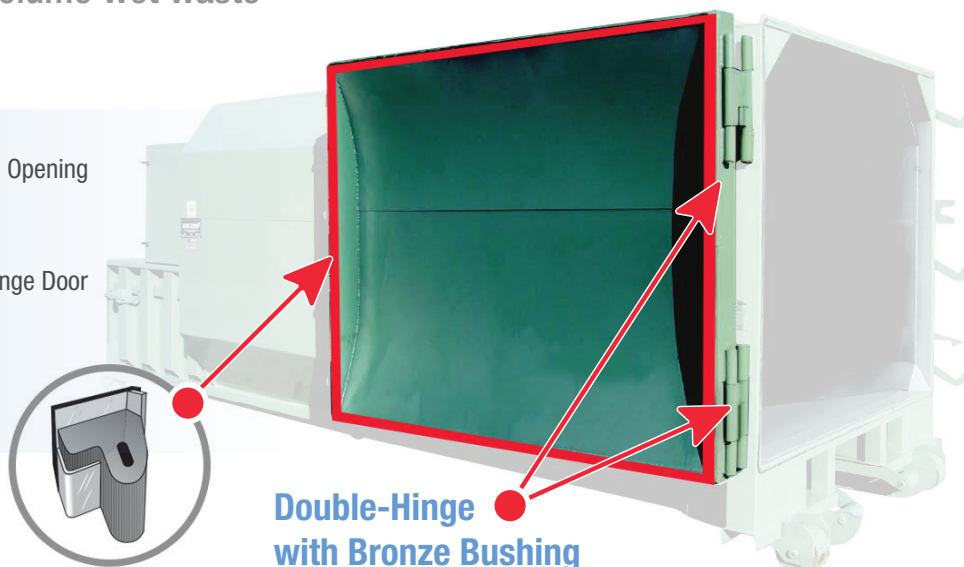


P-Seal Watertight Closure

The P-shaped Door Seal is specially designed for portable compaction containers, providing a superior, watertight closure. The mounting is engineered for quick and easy installation when replacement is necessary, requiring no field fitting, cutting, or welding.

Double-Hinge with Bronze Bushing

Every RJ-250SC is tested for watertightness before leaving the factory. Liquid retention is ensured by the incredible Double-Hinge. It creates uniform seal compression while eliminating the seal "scrubbing" and damage often encountered with competitive designs. The Double-Hinge also saves expensive driver and truck time as only one easy-to operate ratchet is required to make it work.

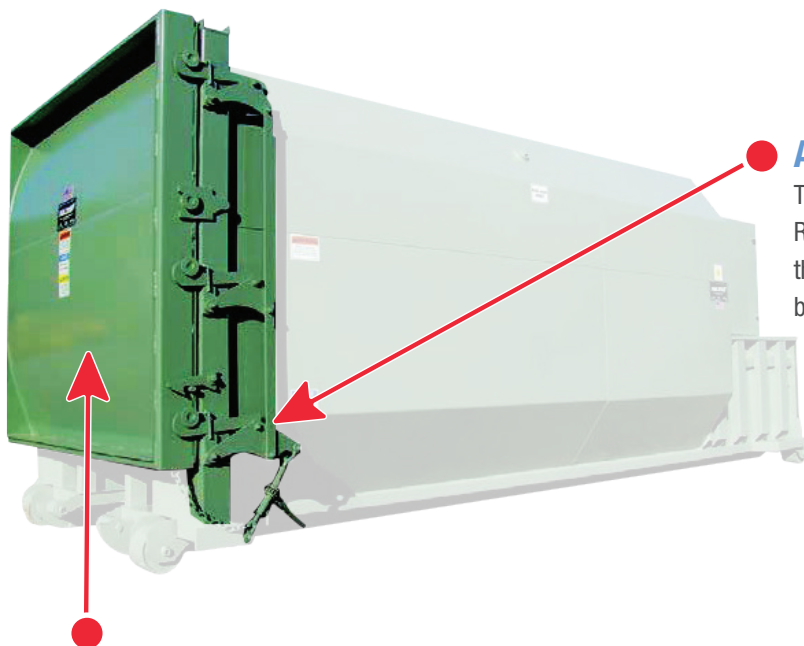

Auto Relatch

The ultimate in latch systems, the Marathon® brand "Auto Relatch" eliminates the need to hold the door while operating the latch ratchet. This design enables the operator to use both hands on the ratchet.



Bubble Gate and Auto Relatch

The innovative "Bubble Gate" adds a full cubic yard to container capacity. Superior compaction ratios result from its special curved shape. These two unique benefits reduce costs of disposal.

Ram Guide System

The packing ram is supported by specially formulated cast iron shoes, which ride on replaceable wear strips. This exclusive design protects the charge box floor from the full force of the packing ram, extending its life, and dramatically reducing compaction-robbing friction.



For more information or to order, call 1-800-633-8974 or visit us at www.marathonequipment.com

WASTE COMPACTORS

RJ-250SC Series Compactor

Features




Remote Power Pack

Separate from the compactor/container, the Marathon® brand Remote Power Pack remains free of damage caused while hauling to and from disposal sites, and stays free of problems caused by landfill dust. There are no electrical connections to make or break, and two simple-to-use, hydraulic quick disconnects couple the power unit to the packing head. All **Marathon** Remote Power Packs are built in-house to our quality standards, and each unit must pass a series of stringent tests before it can be shipped with the selected compactor.



Optional Doghouse

The optional doghouse offers a totally enclosed charge box with heavy-duty latches.

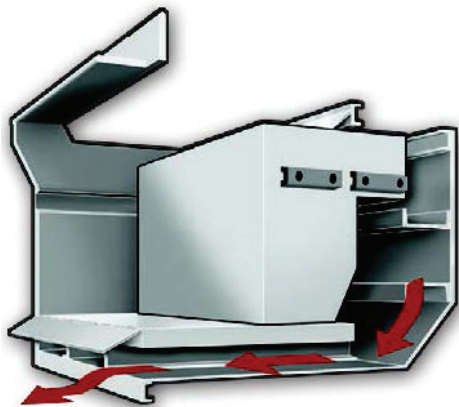

Qwik Clean® Tank Feature

The **Qwik Clean** Tank feature, standard on all RJ-250SC compactors, funnels any liquid seepage, which can occur during compaction, into an enclosed area underneath the charge box floor. Liquid is automatically discharged at the disposal site, in effect flushing the container and the area behind the ram. The 12" (305 mm) high, up to 750-gallon (2839 liter) capacity sump area is designed to provide easier hook access for roll-off drivers.



Cycon Life-Xtender™ Cyclic Control System

**Standard on all RJ-250SC and
RJ-250SC Ultra Compactors**


- ▼ Reliable, solid state circuitry eliminates all pressure and limit switches
- ▼ The **Cycon Life-Xtender** no-shock cycle control extends cylinder and hose wear life
- ▼ Automatic “container full assurance system” — the ram dwells against the load at full pressure, resulting in better compaction
- ▼ Smoother running, quieter operation
- ▼ Advanced hydraulic design enables the system to operate at minimum pressure levels except until the need for more pressure is automatically sensed
- ▼ More accurate Advanced Warning or Container Full options
- ▼ Dramatically improved cold weather performance



For more information or to order, call 1-800-633-8974 or visit us at www.marathonequipment.com

RJ-250SC Series Compactor

Features

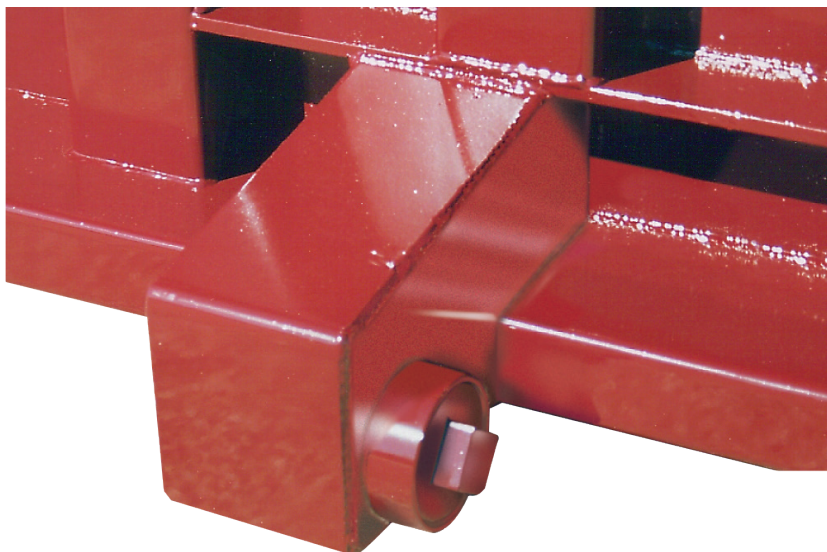

StreamLine® Option

The **StreamLine** option enables excess liquid to be drained from the container, reducing net payload weight, and significantly reducing hauling costs. Liquid is routed to four interconnected 4" (101.6 mm) drain outlets, located at each corner of the **StreamLine** unit. Connection can be made to a hose, piping, or a pump.



Qwik Clean® Door

The **Qwik Clean** door on the packer end makes cleaning out behind the ram-in-cylinder area a snap. The door has miniature hinges, a door seal, and a ratchet binder. Also, featured is the RamJet® rear feed doghouse door option.



Compactor Fundamentals

Eight simple items to consider when choosing the perfect compactor for your application:

- 1 **Recyclables** — Is there sufficient volume of recyclable materials to warrant more than one compaction system or is recycling mandatory?
- 2 **Size of Waste** — Is the Feed (Clear Top) Opening large enough to accommodate the largest items without bridging?
- 3 **Safety Standards** — Does the installation comply with recommended ANSI standards? Is there an access interlock switch on chute or hopper doors and gates? Is a “momentary contact” control required?
- 4 **Power Source** — Is adequate power available? Three or single phase?
- 5 **Convenience** — Is the compactor located for easiest use? Loading height? Can a hopper, doghouse, (charge box enclosure) or cart dumping system improve convenience? Can value be added (building or employee security) by loading through the wall? Would an Ozone Odor Control System solve odor or pest control problems?
- 6 **Volume of Waste Generated** — Will the compactor be adequate to handle the volume generated during the peak load periods?
- 7 **Location** — Does, or can, the waste flow to one central point?
- 8 **Available Space** — Is there space for the Compaction System and maneuvering room for collection trucks? Is there adequate overhead clearance? Is there compatibility with the collection truck?
- ? **Have Questions?** If you have any questions or need assistance with your compaction needs, please call **1-800-633-8974** and speak to a specialist. We are here to help!


RJ-250SC & RJ-250SC Ultra

Dimensions & Specifications

Specifications		
Charge Box Capacity		
[Mfg. Rating]	1.7 yd ³	1.30 m ³
[WASTEC Rating]	1.31 yd ³	1.00 m ³
Clear Top Opening	41" L x 58" W	1,041 mm x 1,473 mm
Performance Characteristics		
Cycle Time	30 sec.	33 sec.
Total Nominal Force	39,900 lbs	177 kN
Total Maximum Force	49,500 lbs	220 kN
Normal Ram Face Pressure	27.1 psi	187 kPa
Maximum Ram Face Pressure	33.7 psi	232 kPa
Ram Penetration	6"	152 mm
Electrical Equipment		
Electric Motor 3/60/230-460	10 hp	7.5 kW
Electric Control Voltage	120 VAC	120 VAC
Panel Box Assembly		
All Circuits Fused	2-Push Button Station Start/Stop	
Hydraulic Equipment		
Hydraulic Pump	3 gpm	38 L/min
Normal Pressure	1,850 psi	128 bar
Maximum Pressure	2,300 psi	159 bar
Hydraulic Cylinders (2) - Bore	4"	102 mm
Rod	2 ½"	64 mm

RJ-250SC	A	B	C	D	E	Classic Weight	Ultra Weight
15 Cu. Yd	48"	43 1/4"	67"	14' 3"	89"	8,860 lbs.	8,360 lbs
	1,219 mm	1,099 mm	1,702 mm	4,343 mm	2,261 mm	4,019 kg	3,792 kg
20 Cu. Yd	48"	43 1/4"	67"	17' 4"	89"	9,520 lbs.	8,860 lbs
	1,219 mm	1,099 mm	1,702 mm	5,283 mm	2,261 mm	4,318 kg	4,019 kg
25 Cu. Yd	48"	43 1/4"	67"	17' 10"	104"	10,030 lbs.	9,720 lbs
	1,219 mm	1,099 mm	1,702 mm	5,436 mm	2,642 mm	4,550 kg	4,205 kg
30 Cu. Yd	48"	43 1/4"	67"	20' 5"	104"	10,620 lbs.	9,715 lbs
	1,219 mm	1,099 mm	1,702 mm	6,223 mm	2,642 mm	4,818 kg	4,407 kg
34 Cu. Yd	48"	43 1/4"	67"	22' 5"	104"	11,130 lbs.	10,100 lbs
	1,219 mm	1,099 mm	1,702 mm	6,833 mm	2,642 mm	5,049 kg	4,582 kg
39 Cu. Yd	48"	43 1/4"	67"	24' 11 1/2"	104"	11,790 lbs.	N/A
	1,219 mm	1,099 mm	1,702 mm	7,607 mm	2,642 mm	5,348 kg	N/A

Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI standard Z245.2, all applicable OSHA Regulations, and certified under WASTEC's Stationary Compactor Certification Program. Products must be used only by trained operators in accordance with the Operator Manual, as well as applicable regulations, laws, and ANSI standards.

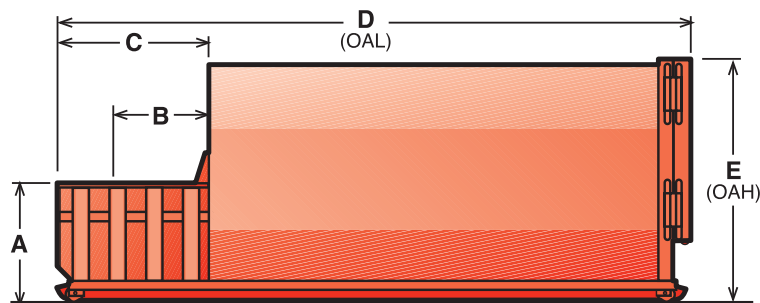

Dimensions not shown: 8'4 1/8" (2543mm) Overall Width

Ground Roller Widths: 61 7/8" (1569mm) Inside Rollers
67 3/8" (1712mm) Roller Centers
72 3/4" (1851mm) Outside Rollers

RJ-250SC Classic containers are constructed out of 7 gauge steel plate.
RJ-250SC Ultra containers are constructed out of 11 gauge steel.

For detailed specifications, recommendations,
or free economic studies comparing various
systems, contact Marathon® Customer Care at
1-800-633-8974

Authorized Dealer:

Compactor & Baler Rental and Leasing Programs Available!



Marathon Equipment Company | P.O. Box 1798 | Vernon, AL 35592-1798

Learn more about Marathon Equipment: 800.633.8974 | www.marathonequipment.com